




# PCD110MRD

## Radiation Damper for PCD110M & PCD110MH


### Dimensions



### Specifications

- Kit includes PCRD-P2 and wiring extender
- 3-hour rating ceiling radiation dampers
- UL Listed Link (165°F Standard)
- UL Approved flexible fire blanket
- Ceramic fiber with fiberglass cover
- Roll-formed frame 22 g. galvanized steel

### Components (Fan not included with PCD110MRD)

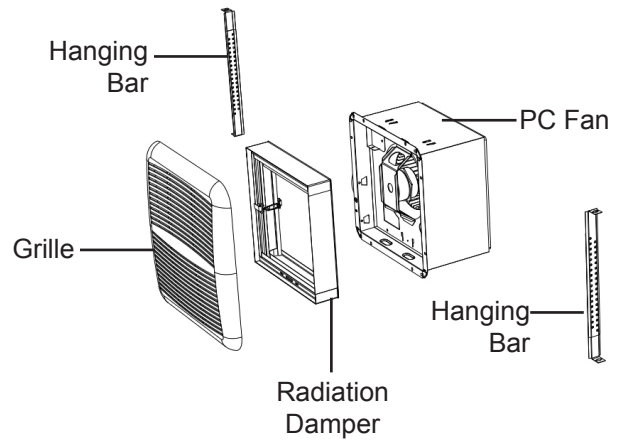

Note: Fan shown is not the PCD110M or PCD110MH

| ACCESSORY MODEL | 1 | 2 | 3 | 4 | 5 | REMARKS |
|-----------------|---|---|---|---|---|---------|
|                 |   |   |   |   |   |         |
|                 |   |   |   |   |   |         |
|                 |   |   |   |   |   |         |
|                 |   |   |   |   |   |         |

PROJECT: \_\_\_\_\_ CONTRACTOR: \_\_\_\_\_  
 LOCATION: \_\_\_\_\_ REVISION DATE: \_\_\_\_\_  
 FORM NO.: \_\_\_\_\_ SUBMITTED BY: \_\_\_\_\_ DATE: \_\_\_\_\_  
 ENGINEER: \_\_\_\_\_ APPROVED BY: \_\_\_\_\_ DATE: \_\_\_\_\_

For more information contact us at [www.solerpalau-usa.com](http://www.solerpalau-usa.com) or 1.800.961.7370 for additional submittal drawings.

S&P will not be responsible for fabrication changes or errors resulting from customer use of a non-current submittal drawing.

